

# SHARK III VENTILATION CHAINSAW

BATSHARK

SHARK II

SHARK III

SHARK CC



 Husqvarna®



## ***Carbide Tipped Rescue Chain***

Specifically designed for Fire Department use, outlasts up to 10 regular chains and stays sharp up to 25 times longer.

## ***Durable Reversible Steel Bar***


You have 3 choices to choose from: 16" 54 Drive link Bar, a 20" 64 Drive link Bar for our legacy SHARK owners (this model is the same as our pre 2020 SHARK saws) or our NEW 20" 66 Drive Link Bar. This new 20" 66 Drive Link Bar is the same size as other brand saws making it easy for spare parts management. With this new 20" 66 DL Bar, our SHARK saw will use the same size chain as other brands. All SHARK bars are slotted to fit our CDA-80 depth adjuster and are reversible hardened steel bars for extended life.

## ***CDA-80 Adjustable Depth Adjuster***

Control cutting depth from 2" to 10" when plunge cutting. Easy, fast removal when full length of bar is needed.

## ***Adjustable Flow Oil Pump***

Keeps chain properly lubricated in diverse conditions with no oil flow at idle.

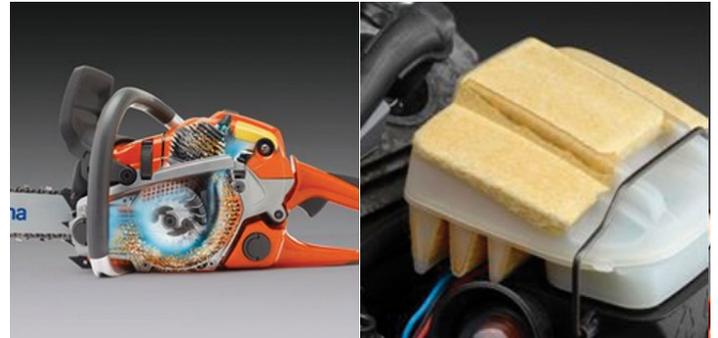

## ***Top of Class Power Plant***

Professional grade Husqvarna power plant provides maximum power through the toughest tasks. 88cc power provides higher cutting capacity with excellent vibration dampening, making work easier and more efficient than ever before

## ***Smart Start®***

Technology guarantees faster start-ups with minimum effort, while the rubber-mounted carburetor boosts durability. Prepare to get the job done like never before.

## ***Air Injection®***

Centrifugal air cleaning system removes larger dust and debris particles before reaching the air filter. This results in reduced air filter cleanings and improved engine life, better filtration.



## ***Adjustable oil pump***

Allows you to control oil flow depending on application and weather conditions.

## TECHNICAL SPECIFICATIONS

| MODEL    | SHARK II - 16" - 54DL | SHARK II - 20" 64DL | SHARK II - 20" 66DL | SHARK III - 16" - 54DL | SHARK III - 16" - 64DL | SHARK III - 16" - 66DL |
|----------|-----------------------|---------------------|---------------------|------------------------|------------------------|------------------------|
| PART NO. | TS2-57216             | TS2-5722064         | TS2-5722066         | TS3-39016              | TS3-3902064            | TS3-3902066            |

| POWER | MANUFACTURER | HUSQVARNA®     |                |                |               |               |               |
|-------|--------------|----------------|----------------|----------------|---------------|---------------|---------------|
|       | POWER HEAD   | 572 XP         | 572 XP         | 572 XP         | 390 XP        | 390 XP        | 390 XP        |
|       | POWER OUTPUT | 5.8hp / 4.3kw  | 5.8hp / 4.3kw  | 5.8hp / 4.3kw  | 6.5hp / 4.8kw | 6.5hp / 4.8kw | 6.5hp / 4.8kw |
|       | DISPLACEMENT | 4.3ci / 70.6cc | 4.3ci / 70.6cc | 4.3ci / 70.6cc | 5.37ci / 88cc | 5.37ci / 88cc | 5.37ci / 88cc |

| CHAIN | DRIVE LINKS | 54 DRIVE LINKS                   | 64 DRIVE LINKS | 66 DRIVE LINKS | 54 DRIVE LINKS | 64 DRIVE LINKS | 66 DRIVE LINKS |
|-------|-------------|----------------------------------|----------------|----------------|----------------|----------------|----------------|
|       | TYPE        | HIGH IMPACT CARBIDE TIPPED CHAIN |                |                |                |                |                |
|       | CUTTER TYPE | CARBIDE FLAT 25° - DUAL RAKER    |                |                |                |                |                |
|       | PITCH       | 0.404 inch                       |                |                |                |                |                |
|       | GAUGE       | 0.063 inch                       |                |                |                |                |                |

| BAR | TYPE                 | HARDENED STEEL                                |         |     |         |         |     |
|-----|----------------------|---|---------|-----|---------|---------|-----|
|     | DEPTH GAUGE READY    | YES - SLOTTED FOR CDA-80 DEPTH GAUGE          |         |     |         |         |     |
|     | NOSE TYPE            | SPROCKET WITH SEALED BEARING                  |         |     |         |         |     |
|     | DURABILITY           | HARDENED STEEL - REVERSABLE FOR EXTENDED LIFE |         |     |         |         |     |
|     | GAUGE                | 0.063 inch                                    |         |     |         |         |     |
|     | LENGTH (NOT MOUNTED) | 18-1/2"                                       | 22-3/8" | 23" | 18-1/2" | 22-3/8" | 23" |

| DEPTH GAUGE | INCLUDED         | YES  |                |               |               |                |               |
|-------------|------------------|--|----------------|---------------|---------------|----------------|---------------|
|             | TYPE             | CDA-80                                     |                |               |               |                |               |
|             | ATTACHMENT TYPE  | OPEN - SLOT MOUNTED - EASY ONE HAND ON/OFF |                |               |               |                |               |
|             | MATERIAL         | ALUMINUM                                   |                |               |               |                |               |
|             | DEPTH ADJUSTMENT | 2" to 9" Apx.                              | 2" to 10" Apx. | 2" to 9" Apx. | 2" to 9" Apx. | 2" to 10" Apx. | 2" to 9" Apx. |

| DIMENSIONS | WEIGHT | 20.2 lbs / 9.2 kg | 20.9 lbs / 9.5 kg | 21.1 lbs / 10.9 kg | 22.2 lbs / 10.1 kg | 22.9 lbs / 10.4 kg | 23 lbs / 10.4 kg |
|------------|--------|-------------------|-------------------|--------------------|--------------------|--------------------|------------------|
|            | LENGTH | 32.5 in / 826 mm  | 36.5 in / 927 mm  | 37.5 in / 953 mm   | 32.5 in / 826 mm   | 36.5 in / 927 mm   | 37.5 in / 953 mm |
|            | WIDTH  | 12.5 in / 318 mm  | 12.5 in / 318 mm  | 12.5 in / 318 mm   | 12.5 in / 318 mm   | 12.5 in / 318 mm   | 12.5 in / 318 mm |
|            | HEIGHT | 12.5 in / 318 mm  | 12.5 in / 318 mm  | 12.5 in / 318 mm   | 13.2 in / 335 mm   | 13.2 in / 335 mm   | 13.2 in / 335 mm |

| OTHER | FULL WRAP HANDLE    | YES  |  |  |                    |  |  |
|-------|---------------------|--|--|--|--------------------|--|--|
|       | SCRENCH TOOL HOLDER | YES  |  |  |                    |  |  |
|       | "D" STARTER HANDLE  | YES  |  |  |                    |  |  |
|       | X-TORQ POWER        | YES  |  |  |                    |  |  |
|       | AUTOTUNE CARB.      | YES  |  |  | NO                 |  |  |
|       | SPARK PLUG          | CHAMPION RCJ7Y / NGK BPMR7A                            |  |  |                    |  |  |
|       | FUEL CAPACITY       | 0.185 gal / 0.70 L                                     |  |  | 0.238 gal / 0.90 L |  |  |
|       | FUEL TYPE           | 87 OCTANE GASOLINE OR HIGHER - 2 STROKE OIL MIXED 50:1 |  |  |                    |  |  |
|       | BAR OIL CAPACITY    | 0.425 qt / 0.40 L                                      |  |  | 0.53 qt / 0.50 L   |  |  |
|       | NOISE LEVEL         | AT OPERATOR 105 db                                     |  |  | AT OPERATOR 107 db |  |  |
|       | WARRANTY            | 1 YEAR   |  |  |                    |  |  |



**TEAM EQUIPMENT, INC.**  
 6620 Orchid Lake Road  
 New Port Richey, FL. 34653  
 727-848-2424 | 800-367-9054  
 www.teamequipment.com

Available Through Dealers Nationwide